

African Pegmatite (Pty) Ltd
27 Van Der Bijl Street,
PO Box 598, Meyerton 1960
Gauteng, South Africa
Email: wenger@pegmatite.co.za
reception@pegmatite.co.za
Website: www.mineralmilling.com

Tel: +27 016 362 0600/1/2/3/4
Int: +27 16 362 0600
Fax: 016 362 1239

MILLERS & PROCESSORS OF BASE MINERALS




Approved by:
Compiled by: J Sowerby

Doc No: DSC 005
Rev No: 06

Date: 15 January 2008
Page: 1 of 1

Data Sheet

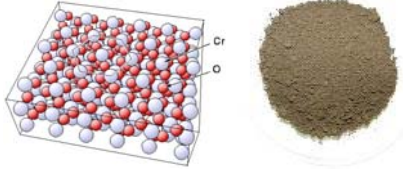

Product: Chrome Flour
Grade: Export Grade

CHEMICAL ANALYSIS %

Typical:

Cr2O3	44 - 46%	MgO	10 - 11%
SiO2	3 - 4%	Al2O3	14 - 15%
CaO	0.5 - 1.0%	Cr/Fe	1 : 1.54
FeO	25 - 26%		

PHYSICAL PROPERTIES:

Particle Size:

45 µm	-	2 - 3%
Moisture	-	0.2% max

APPLICATION:

Colourant in glass and ceramics. Refractory monolithics and bricks.
Chemicals

PACKING:

Packed in 25kg or 40kg -3 ply paper bags, stretch wrapped on pallets, or 1m/t polypropylene bags.

The information and recommendations in this product data sheet are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, African Pegmatite Company South Africa makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose.

We recommend that the user determine whether the products and the information given are appropriate, and that the suitability and performance of our products are appropriate by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this product data sheet should not be understood as a recommendation for the use of our products in violation of any patent or as a license to use any patents of the African Pegmatite Company South Africa.

Tel: +27 16 362-0600/4 Fax: +27 16 362-1239 Website: www.mineralmilling.com

